

Bali® Shutters

Measuring and Ordering Guide



*Durable
Composite
Shutters*

2½" Shutters with Standard L-Frame and Hidden Rear Tilt: Simply White 2051

Determine Your Window Type

Wood-wrapped window



Window Type 1


- Window opening **with molding, without sill**
- See install option A



Window Type 2


- Window opening **with molding and sill**
- See install option A

Drywall-wrapped window (window edge can be square or rounded)

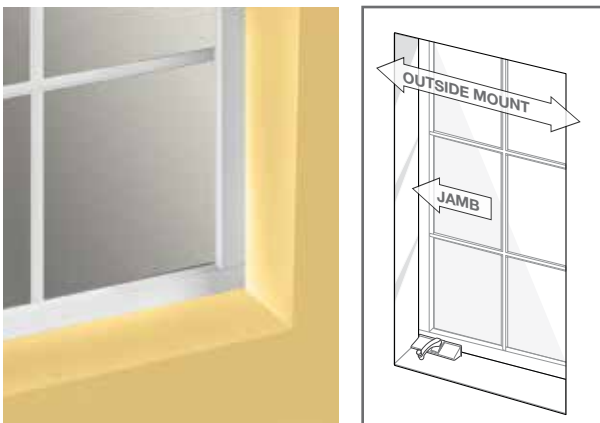

Window Type 3

- Window opening **without molding or sill**
- See install option B

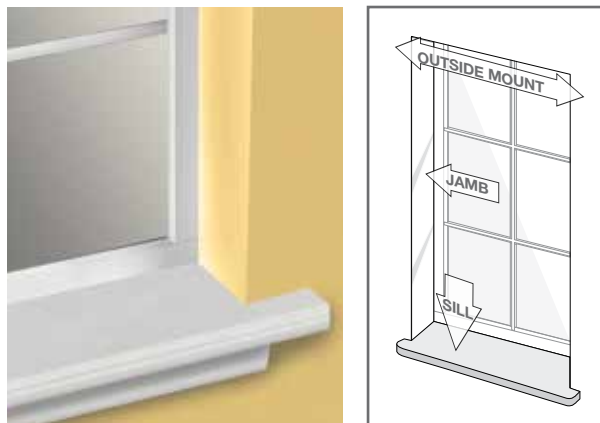


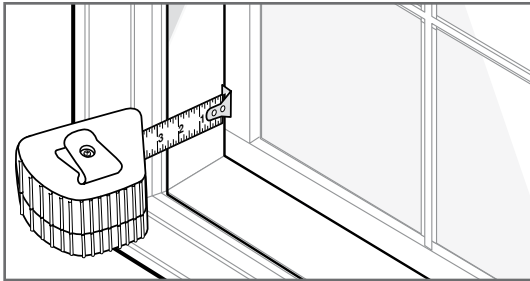
Window Type 4

- Window opening **without molding, with sill**
- See install option B

Install Option A - Inside Mount Hang Strips

Shutters are mounted to the inside of the window jamb using hang strips.


- Hang strip is a vertical frame that is attached to the window jamb and holds the shutter panel and hinges
- Window jamb must be at least 2½" deep; if less than 2½",  See Install Option C
- Hang strip and panels will sit completely inside the window opening



- Does the window have any of the following: crank handles, lever locks, alarms, or tilt in for cleaning?
- If you answered yes to any of the above,



 See Install Option C

Inside-mount shutters are excellent for windows with decorative moldings or trims. Hang-strip installation can be used for windows with or without a sill.



How to Measure

1. Use a steel tape measure only.
2. Do not make any deductions, allowances, or additions to your measurements. Factory will make deductions for inside mount.
3. Measure to the nearest ¼".
4. To confirm the window is square, measure the diagonals. If the difference between the two is greater than ¼", an outside-mount shutter is required (see Install Option C).
5. Measure window width in three places and record the smallest measurement.
6. Measure window height in three places and record the smallest measurement.

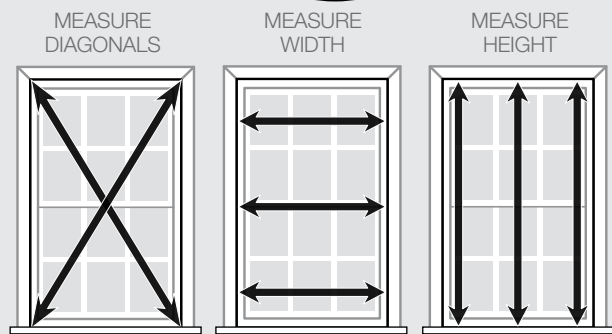

Install Option B - L-Frame Mounted to Wall



Shutters are mounted on the wall surrounding the window using our L-frame. If the window has a sill, the frame will rest on top of the sill.

- There must be a minimum of $1\frac{3}{4}$ " of wall space above, below, and on either side of the window for windows without a sill
- If the window has a sill, there must be at least $1\frac{3}{4}$ " of wall space on top and on either side of the window



If less than $1\frac{3}{4}$ " of clearance, you cannot install Bali shutters on this window.



- Cranks that project outside of the window jamb will need to have the crank handle removed to close the shutter

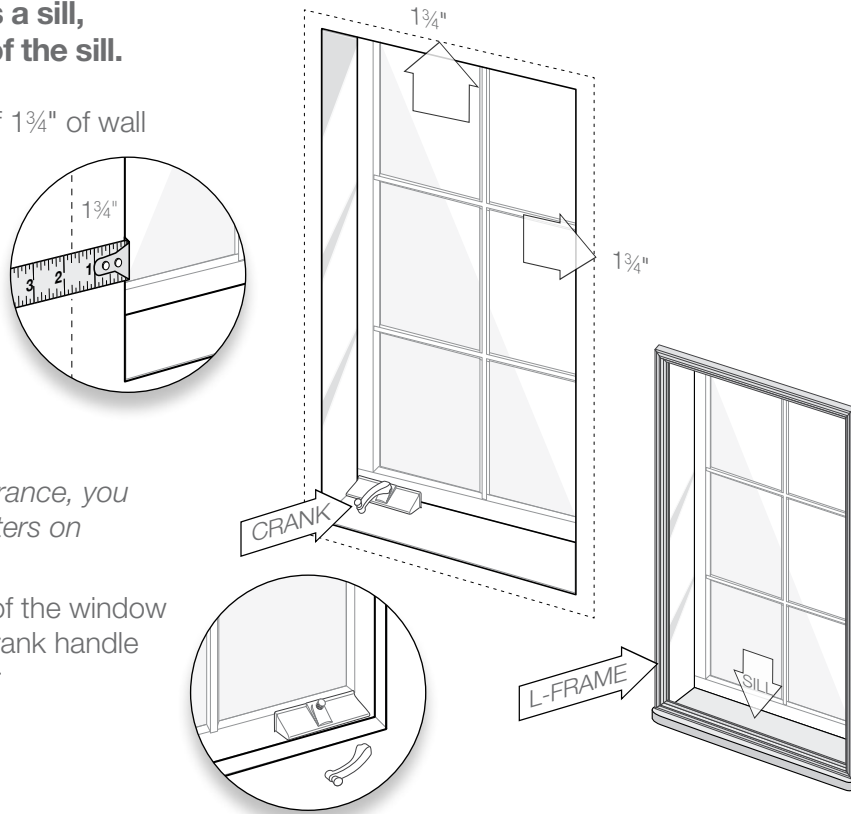

How to Measure

1. Use a steel tape measure only.
2. Do not make any deductions, allowances, or additions to your measurements. Factory will make allowances, for frame.
3. Measure to the nearest $\frac{1}{16}$ ".
4. If the window edge is rounded, place the tape measure beyond the rounded edge where the wall becomes flat.
5. Measure window width in three places and record the largest measurement.
6. Measure window height in three places and record the largest measurement.



Note: Manufacturing will **add** to the window measurements. The shutter frame will sit outside the window opening when installed. Outside mount only.

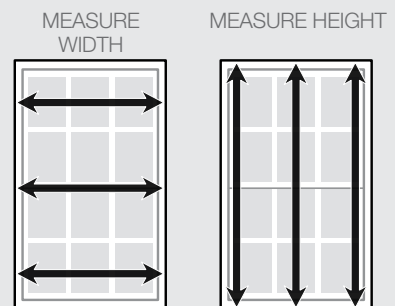


Install Option C - L-Frame Mounted to Molding/Trim

Shutters are mounted on the decorative molding or trim around the window using our L-frame. The L-frame will be screwed onto the molding/trim.

- L-frame installation can be used on windows with or without sills
- Molding must be at least 2" wide
- The outside edge of the molding (farthest from the window) must be the highest point of the molding

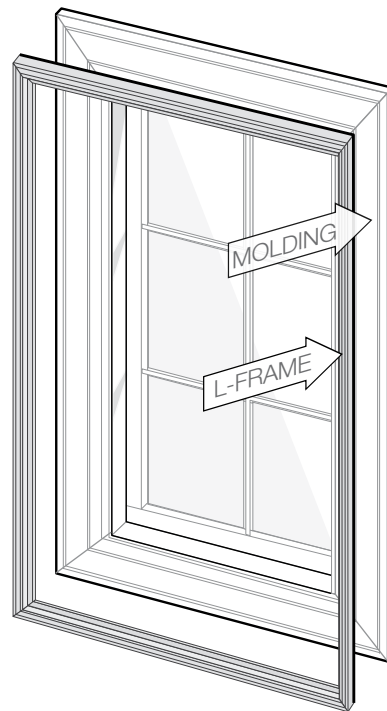

If your molding does not meet the above requirements, Bali shutters cannot be installed in your windows.





How to Measure

1. Use a steel tape measure only.
2. Do not make any deductions, allowances, or additions to your measurements.
3. Measure to the nearest $\frac{1}{16}$ ".
4. Measure window width in three places from the outside edge of the molding to the opposite outside edge. Record the largest measurement.
5. Measure window height in three places from the top outside edge of the molding to the bottom outside edge of the molding. Record the largest measurement.

Note: If the window has a sill, measure from the top edge of the molding to the top of the sill.

No deductions or additions are made to the sizes given. Manufacturing will make the frame to exact size provided.

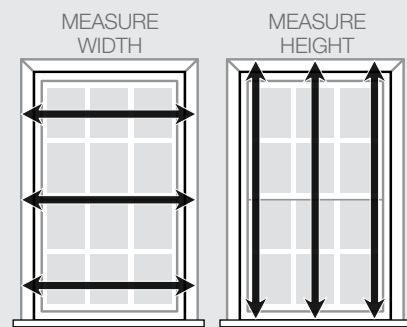


Bali® Shutter Specifications



Divider Rails

For panels over 72" in height, there will be a divider rail positioned at the center of the panel for structural strength. Divider rails can be requested for shutters under 72" in height. Use divider rails to create top and bottom sections. Louvers on top can be left open while bottom louvers can be closed for privacy.



Hidden Rear Tilt A thin stainless steel bar is attached to the outside edge of the louvers on the back hinge side of the panel. Tilting of the louvers is controlled by moving any louver. Tilt bar is metal color.

Light Blocks

Light blocks are provided with Install Option A to fill light gaps on the top and bottom of the window.




Installation

Detailed pictorial installation instructions will be provided with the product. The installation instructions are also available on Homedepot.com/bali. Bali shutters are attached to the window or wall with Phillips head screws. You will need the following:

- Level
- Drill with a 1/16" drill bit
- Phillips head bit or screwdriver
- Hammer or rubber mallet
- Steel tape measure

All screws, hinges, and hardware will be supplied with the product. Hinges, magnets, and catch plates will be pre-installed in the factory.




Louver Sizes

2 1/2" Louvers

- Traditional in style
- Minimal window depth needed
- Shutters are focal point of the room

3 1/2" Louvers

- Most widely used louver size
- Offers more visibility and light control than 2 1/2" louver
- Design flexibility when working with space around shutter



T-Posts

T-posts are vertical structural frame pieces on wide shutters to which panels can be mounted or closed. T-posts will be centered.



Tilt Options


Standard Front Tilt A 5/8" wide composite bar is stapled to the louvers and controls the tilting of the louvers up or down. Tilt bar matches shutter color.

Determine how you would like the shutter panels to open.

Panel Configuration (top view)	Install Option A		Install Option B		Install Option C	
	width (inches)		width (inches)		width (inches)	
	Min	Max	Min	Max	Min	Max
L	9 ³ / ₁₆	30 ³ / ₁₆	7 ¹⁵ / ₁₆	28 ¹⁵ / ₁₆	11 ³ / ₁₆	32 ¹ / ₄
R	9 ³ / ₁₆	30 ³ / ₁₆	7 ¹⁵ / ₁₆	28 ¹⁵ / ₁₆	11 ³ / ₁₆	32 ¹ / ₄
LL	18 ¹ / ₁₆	48	16 ¹³ / ₁₆	46 ³ / ₄	20 ¹ / ₁₆	50 ¹ / ₁₆
RR	18 ¹ / ₁₆	48	16 ¹³ / ₁₆	46 ³ / ₄	20 ¹ / ₁₆	50 ¹ / ₁₆
LR	18 ³ / ₁₆	60	16 ¹³ / ₁₆	58 ³ / ₄	20 ¹ / ₁₆	62 ¹ / ₁₆
LLRR	36 ⁵ / ₁₆	95 ⁵ / ₈	35 ¹ / ₁₆	94 ³ / ₈	38 ⁵ / ₁₆	97 ¹¹ / ₁₆
LRTL	N/A	N/A	35 ⁷ / ₈	119 ⁻³ / ₄	39 ¹ / ₈	123 ¹ / ₁₆

Examples of panel configurations

Maximum shutter height is 96" including frame.

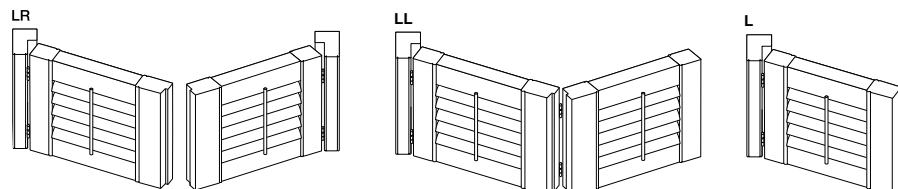

Bali® Shutters Order Information Worksheet

Each section on this page should contain measurements for one window. Use as many sections as needed.



Window Type	Install Option	Width (inches)	Height (inches)	Color Name & Number	
<input type="checkbox"/> Window with molding, without sill <input type="checkbox"/> Window with molding and sill <input type="checkbox"/> Window without molding or sill <input type="checkbox"/> Window without molding, with sill	<input type="checkbox"/> Inside-mount hang strips (option A) <input type="checkbox"/> L-frame mounted to wall (option B) <input type="checkbox"/> L-frame mounted to molding/trim (option C)			<input type="checkbox"/> 2051 Simply White <input type="checkbox"/> 2922 Winter White <input type="checkbox"/> 2729 Cream	
Panel Configuration	Louver Size	Room		Tilt Option	*Divider Rail (if under 72" height)
<input type="checkbox"/> L <input type="checkbox"/> R <input type="checkbox"/> LL <input type="checkbox"/> RR <input type="checkbox"/> LRTLRL <input type="checkbox"/> LLRR	<input type="checkbox"/> 2½" <input type="checkbox"/> 3½"	<input type="checkbox"/> Living room <input type="checkbox"/> Dining room <input type="checkbox"/> Bathroom <input type="checkbox"/> Family room <input type="checkbox"/> Home office <input type="checkbox"/> Kitchen <input type="checkbox"/> TV/media room <input type="checkbox"/> Bedroom <input type="checkbox"/> Other _____		<input type="checkbox"/> Standard front tilt bar <input type="checkbox"/> Rear hidden tilt bar	<input type="checkbox"/> Yes <input type="checkbox"/> No Rail will be centered

*When ordering a divider rail on shutters that will be in the same room or side by side, order shutters at the same height to ensure divider rail location will match.

Window Type	Install Option	Width (inches)	Height (inches)	Color Name & Number	
<input type="checkbox"/> Window with molding, without sill <input type="checkbox"/> Window with molding and sill <input type="checkbox"/> Window without molding or sill <input type="checkbox"/> Window without molding, with sill	<input type="checkbox"/> Inside-mount hang strips (option A) <input type="checkbox"/> L-frame mounted to wall (option B) <input type="checkbox"/> L-frame mounted to molding/trim (option C)			<input type="checkbox"/> 2051 Simply White <input type="checkbox"/> 2922 Winter White <input type="checkbox"/> 2729 Cream	
Panel Configuration	Louver Size	Room		Tilt Option	*Divider Rail (if under 72" height)
<input type="checkbox"/> L <input type="checkbox"/> R <input type="checkbox"/> LL <input type="checkbox"/> RR <input type="checkbox"/> LRTLRL <input type="checkbox"/> LLRR	<input type="checkbox"/> 2½" <input type="checkbox"/> 3½"	<input type="checkbox"/> Living room <input type="checkbox"/> Dining room <input type="checkbox"/> Bathroom <input type="checkbox"/> Family room <input type="checkbox"/> Home office <input type="checkbox"/> Kitchen <input type="checkbox"/> TV/media room <input type="checkbox"/> Bedroom <input type="checkbox"/> Other _____		<input type="checkbox"/> Standard front tilt bar <input type="checkbox"/> Rear hidden tilt bar	<input type="checkbox"/> Yes <input type="checkbox"/> No Rail will be centered

*When ordering a divider rail on shutters that will be in the same room or side by side, order shutters at the same height to ensure divider rail location will match.

Window Type	Install Option	Width (inches)	Height (inches)	Color Name & Number	
<input type="checkbox"/> Window with molding, without sill <input type="checkbox"/> Window with molding and sill <input type="checkbox"/> Window without molding or sill <input type="checkbox"/> Window without molding, with sill	<input type="checkbox"/> Inside-mount hang strips (option A) <input type="checkbox"/> L-frame mounted to wall (option B) <input type="checkbox"/> L-frame mounted to molding/trim (option C)			<input type="checkbox"/> 2051 Simply White <input type="checkbox"/> 2922 Winter White <input type="checkbox"/> 2729 Cream	
Panel Configuration	Louver Size	Room		Tilt Option	*Divider Rail (if under 72" height)
<input type="checkbox"/> L <input type="checkbox"/> R <input type="checkbox"/> LL <input type="checkbox"/> RR <input type="checkbox"/> LRTLRL <input type="checkbox"/> LLRR	<input type="checkbox"/> 2½" <input type="checkbox"/> 3½"	<input type="checkbox"/> Living room <input type="checkbox"/> Dining room <input type="checkbox"/> Bathroom <input type="checkbox"/> Family room <input type="checkbox"/> Home office <input type="checkbox"/> Kitchen <input type="checkbox"/> TV/media room <input type="checkbox"/> Bedroom <input type="checkbox"/> Other _____		<input type="checkbox"/> Standard front tilt bar <input type="checkbox"/> Rear hidden tilt bar	<input type="checkbox"/> Yes <input type="checkbox"/> No Rail will be centered

*When ordering a divider rail on shutters that will be in the same room or side by side, order shutters at the same height to ensure divider rail location will match.

Additional Notes

Delivery Shutters will be delivered in approximately three to four weeks. Product weight varies by size. Average shutter weighs 55 lbs.

Shipping Damage Report any shipping damage to the consumer hotline telephone number listed below.

Changes/Modifications Orders cannot be changed or modified after one business day from the original order date.



Shutter Pricing

Price Chart 1: Composite Shutters

- Available in 2½" or 3½" louvers
- Frame options: Hang Strip, L-Frame
- Price listed is based on ordered size

Install Option A

Minimum size: 9³/₁₆" x 15¹/₄"
Maximum size: 95⁵/₁₆" x 96"

Install Option B

Minimum size: 7¹/₁₆" x 15¹/₄"
Maximum size: 119³/₄" x 96"

Install Option C

Minimum size: 11³/₁₆" x 17³/₁₆"
Maximum size: 123¹/₁₆" x 96"

		width (inches) →																	
		18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	123 ¹ / ₁₆
height (inches) ↓	18	\$43	58	72	87	101	116	130	145	159	174	188	203	217	231	246	260	275	289
	24	58	77	96	116	135	154	174	193	212	231	251	270	289	309	328	347	366	386
	30	72	96	121	145	169	193	217	241	265	289	313	338	362	386	410	434	458	482
	36	87	116	145	174	203	231	260	289	318	347	376	405	434	463	492	507	550	579
	42	101	135	169	203	236	270	304	338	371	405	439	473	506	540	574	608	641	675
	48	116	154	193	231	270	309	347	386	424	463	501	540	579	617	656	694	733	771
	54	130	174	217	260	304	347	391	434	477	521	564	608	651	694	738	781	824	868
	60	145	193	241	289	338	386	434	482	530	579	627	675	723	771	820	868	916	964
	66	159	212	265	318	371	424	477	530	583	636	689	743	796	849	902	955	1008	1061
	72	174	231	289	347	405	463	521	579	636	694	752	810	868	926	984	1041	1099	1157
78	188	251	313	376	439	501	564	627	689	752	815	878	940	1003	1066	1128	1191	1254	
84	203	270	338	405	473	540	608	675	743	810	878	945	1013	1080	1148	1215	1283	1350	
90	217	289	362	434	506	579	651	723	796	868	940	1013	1085	1157	1229	1302	1374	1446	
96	231	309	386	463	540	617	694	771	849	926	1003	1080	1157	1234	1311	1389	1466	1543	

- Hide-a-tilt surcharge: \$39



The color swatches in this brochure are photographic representations of colors available in the Bali Shutters product line. There may be slight color differentiations depending on the light conditions where these products will be used.